
## **TECHNICAL DATA SHEET**

## WILLIAM red Low ESD S1P Typ 1 No. 7274101

Sz. 40 - 48



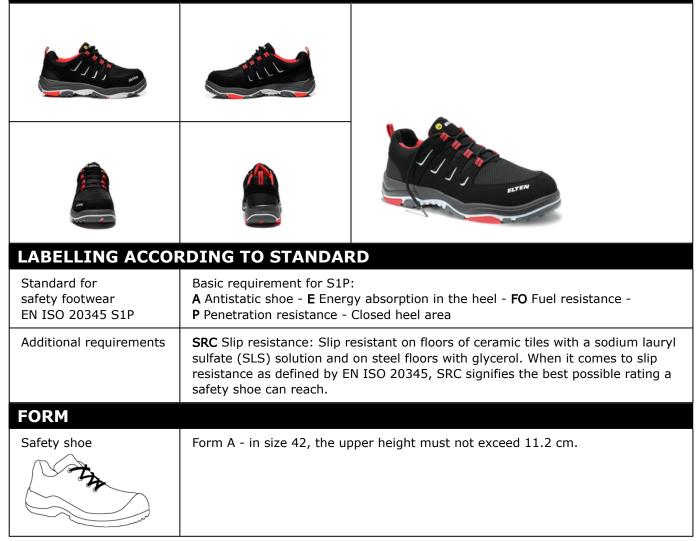

FIT		
ERGO-ACTIVE foot-type system	ERGO-ACTIVE foot type system with three fit variants	
	The right shoe for everyone: Three different types of lasts do not only take into account length and width of the foot, but also toe length, heel width and angle of the ball of the foot.	
	Foot type 1:	
	For larger feet	
	Short toes	
	Wide ball and heel area     Steen ball angle	
	Steep ball angle	
	Foot type 2:	
	For normal feet	
	Long toes	
	<ul><li>Medium-wide ball and heel area</li><li>Flat ball angle</li></ul>	
	Foot type 3:	1100 N
	For slim feet	
	Medium-sized toes	$\Delta \Lambda$
	<ul><li>Narrow ball and heel area</li><li>Medium ball angle</li></ul>	
AREAS OF APPLIC	ATION	
Areas of application	Dry work areas Industry, storage, transport, assembly etc. Areas where there is a risk of penetration from pointed and sharp object	ts (S1P)
	Areas where there is a risk of electrostatic discharge (ESDS/ESD)	
FEATURES		
ESD equipment	Thanks to its excellent discharge capability, the shoe is suitable for work in ESD sensitive or electrostatically protected areas (EPA). The shoes comply to the standard 61340-5-1.	ESD
Certification in accordance with DGUV rule 112-191	<ul> <li>Certified for orthopaedic modifications / inserts</li> </ul>	
Padded upper edge	• Excellent wearing comfort: the padded upper edge protects the Achilles tendon.	
Padded tongue	• Excellent wearing comfort: The tongue prevents pressure marks.	
Reflective material	Good visibility in the dark	
Heel loop	Quicker into the shoe: The heel loop makes it easier to get inside the shoe	
Leather-free equipment	Suitable for persons allergic to leather	



FEATURES		
Winner Plus X Award	The independent jury for the Plus X Award, the Innovation Prize for Technology, Spot, and Lifestyle, grants a total of seven seals of approval to brands that offer products with a competitive edge in terms of quality and innovation. ELTEN has always seen itself as an innovative business at the cutting edge of technology.	
UPPER MATERIAL		
Microfibre	<ul> <li>Synthetic material</li> <li>Particularly soft</li> <li>Retains its shape</li> <li>Tear-resistant</li> <li>Quick drying</li> <li>Abrasion-resistant and light</li> </ul>	
Mesh material	<ul> <li>Areas of application S1</li> <li>Synthetic material</li> <li>Retains its shape</li> <li>Tear-resistant</li> <li>Quick drying</li> <li>Abrasion-resistant and light</li> </ul>	
LINING		
Breathable fabric lining	<ul> <li>Climate-regulating</li> <li>Good ventilation</li> <li>Skin-friendly</li> <li>High absorption and emission of moisture</li> </ul>	
Heel pocket lining	<ul> <li>The abrasion-resistant microfibre material is particularly sturdy and provides for a pleasant wearing comfort.</li> </ul>	
<b>TOE PROTECTION</b>	CAP	
Steel toe cap	<ul> <li>Protection against impacts of min. 200 joules and pressure loading of min. 15 kN</li> <li>Permanent edge coverage for cushioning</li> <li>Ergonomically shaped</li> <li>Comfortable toe room</li> <li>Good coverage of the little toe area</li> </ul>	
INLAY SOLE		
Semi-orthopaedic inlay sole ESD	<ul> <li>ESD EQUIPMENT: Protection against electrostatic discharge (ESD). The full-length, exchangeable inlay sole is conductive and designed for the use in ESD safety footwear according to the standards DIN EN ISO 20345 and DIN EN 61340-5-1.</li> <li>The sole's footbed is tailored to the fit of the shoe as well as to the natural, intact longitudinal arch of the foot.</li> <li>The improved heel damping is kind to the entire musculoskeletal system – from foot to spinal column.</li> <li>Improvement of the shoe climate thanks to the PU foam's open cell structure. So the foot is always kept comfortably dry.</li> <li>The extreme softness of the PU foam absorbs shocks on impact and increases walking comfort.</li> </ul>	

PENETRATION RESISTANCE		
Metal-free penetration protection	The textile midsole complies with the penetration safety standard EN 12568 and furthermore fulfils the additional requirements for penetration protection in accordance with EN ISO 20344 / 20345. The light and flexible material enables an increased elasticity of the shoe, which can particularly be recognized when working on uneven grounds or on your knees.	
	The textile variant offers 100 % foot coverage compared to steel midsoles (foot coverage 85 % due to limits in the shoe manufacturing process). Being 100 % metal-free and antimagnetic, this equipment is used as penetration protection in safety shoes.	
OUTSOLE		
ERGO-ACTIVE double- density sole with profile	<ul> <li>S-line shaped configuration of the tread blocks, for an ergonomic foot roll</li> <li>Contrasting colours for dynamic design</li> <li>Excellent slip resistance</li> <li>Antistatic</li> </ul>	
	Outsole: TPU (thermoplastic polyurethane) • Colour: lightgrey, with coloured inserts • Profile depth: 3.5 mm • Particularly abrasion-resistant • Heat-resistant to approx. 130°C • Flexible at cold temperatures to approx30°C • Oil and fuel resistant	
	<ul><li>Midsole: PU (polyurethane)</li><li>The soft PU core provides a good impact absorption and high wearing comfort</li></ul>	