




## Data Sheet

### Heat Shrinkable Moulded Parts 3M™ SKE End Caps

**REACH**  
1907/2007/EC

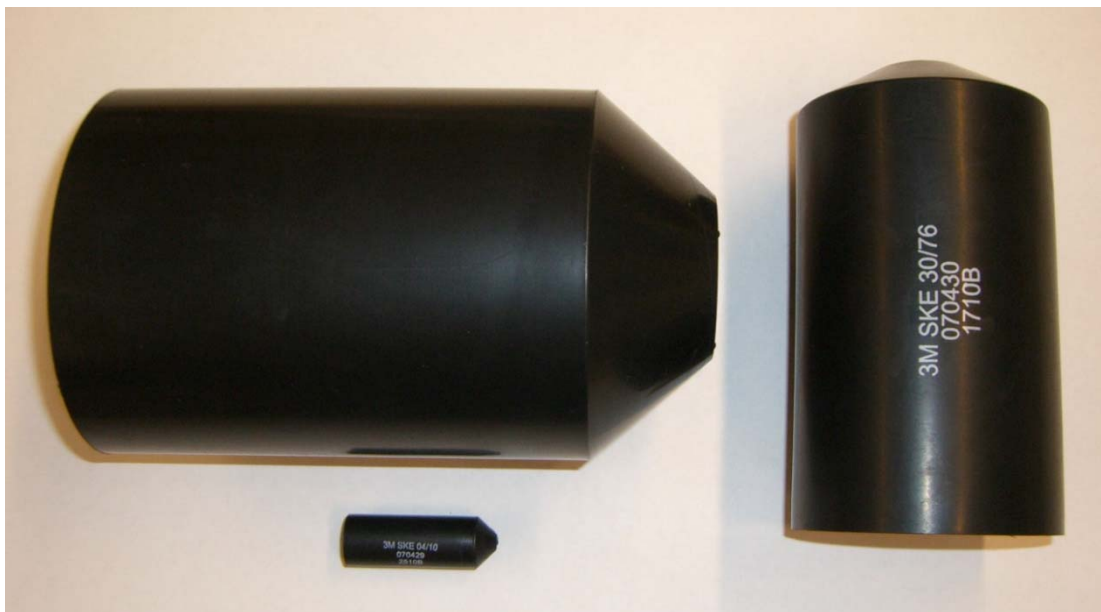

## Description

3M Cable End Caps and 3-, 4-Way Breakouts are designed for quick and easy insulation and sealing of cable end or crutches, and provide resistance to abrasion, weathering and chemical attack. Each Heat Shrink part will cover a wide range of sizes and different kind of cables.

**Electrical Markets Division**  
**3M United Kingdom PLC**  
**Sales Office**  
PO Box 393  
Bedford MK41 0YE  
Telephone: 0870 609 4639  
Fax: 01234 229 433

**3M Ireland Ltd**  
**Sales Office**  
The Iveagh Building, The Park,  
Carrickmines, Dublin 18, Ireland  
Telephone: (01) 800 812 732  
Fax: 353 1 280 3509

**3M United Kingdom PLC**  
**Head Office**  
3M Centre, Cain Road  
Bracknell, Berkshire RG12 8HT  
Telephone: 01344 858 000  
Fax: 01344 858 758

## Technical Information

These parts are made from semi-rigid, cross-linked modified polyolefin material, which is internally coated with hot melt adhesive. The materials used are halogen free.

On application of heat the adhesive melts and the part shrinks forming a perfect watertight seal. They can be used for insulating/sealing of cable ends for indoor and outdoor applications.

## Dimensions

Product Description	Application Range	Ø Exp.	Ø Recov.	Length Recov.	Wall Thickness Recov.
	mm	mm	mm	mm	mm
SKE 4/10	4 - 8	10	4	40	2.5
SKE 8/20	8 - 16	20	8	65	2.5
SKE 15/40	15 - 32	40	15	105	3.0
SKE 25/63	25 - 51	63	25	160	4.5
SKE 30/76	30 - 61	76	30	140	4.5
SKE 45/100	45 - 80	100	45	160	4.0
SKE 61/158	63 - 126	158	63	190	4.0

**Electrical Markets Division**  
**3M United Kingdom PLC**  
**Sales Office**  
 PO Box 393  
 Bedford MK41 0YE  
 Telephone: 0870 609 4639  
 Fax: 01234 229 433

**3M Ireland Ltd**  
**Sales Office**  
 The Iveagh Building, The Park,  
 Carrickmines, Dublin 18, Ireland  
 Telephone: (01) 800 812 732  
 Fax: 353 1 280 3509

**3M United Kingdom PLC**  
**Head Office**  
 3M Centre, Cain Road  
 Bracknell, Berkshire RG12 8HT  
 Telephone: 01344 858 000  
 Fax: 01344 858 758

## Material Characteristic

Physical Properties	Value	Test Method
Density	1.05 ± 0.2 g/cm <sup>3</sup>	ASTM D-1505/D=M/V
Hardness	45 ± 3 shore D	ASTM D-2240
Tensile strength	10 N/mm <sup>2</sup>	ASTM D-412 / ISO 37
Ultimate elongation	300 %	ASTM D-412 / ISO 37
Water absorption	0.15 %	ASTM D-570 / ISO 62
Longitudinal Shrinkage	10 %	-
Recovery Temperature	120 °C	IEC - 216
Peel strength	100 N/25 mm	Rolling Drum method
<b>Thermal Tests</b>		
Operating temperature range	- 30 °C, + 135 °C	DIN 53 466
Thermal Ageing (150 °C for 168 hrs)		
Tensile strength	8 N/mm <sup>2</sup>	ASTM D-412 / ISO 37
Ultimate elongation	200 %	ASTM D-412 / ISO 37
Flammability	Not self extinguishing	ASTM D 876
Low Temperature Flexibility	- 40 °C	ASTM D 2671C
<b>Electrical Properties</b>		
Volume resistivity	1 x 10 <sup>13</sup> Ohm-cm	ASTM D-257 / IEC 93
Dielectric strength	10 kV/mm	ASTM D-149 / IEC 243
<b>Chemical Properties</b>		
Corrosion	None	ASTM D 2671

The above figures are average values, established to our best knowledge, but not to be used for specification purpose.

**Electrical Markets Division**  
**3M United Kingdom PLC**  
**Sales Office**  
 PO Box 393  
 Bedford MK41 0YE  
 Telephone: 0870 609 4639  
 Fax: 01234 229 433

**3M Ireland Ltd**  
**Sales Office**  
 The Iveagh Building, The Park,  
 Carrickmines, Dublin 18, Ireland  
 Telephone: (01) 800 812 732  
 Fax: 353 1 280 3509

**3M United Kingdom PLC**  
**Head Office**  
 3M Centre, Cain Road  
 Bracknell, Berkshire RG12 8HT  
 Telephone: 01344 858 000  
 Fax: 01344 858 758