

Product Datasheet model uvex suXXeed 9181 281

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth**


1. Product Characteristics

- sporty safety spectacle in an appealing, dynamic design
- ergonomically shaped side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- soft, flexible nose pad adapts to the wearer, delivering a nonslip and pressure-free fit
- UV400 – 100 % protection against dangerous UVA and UVB radiation up to 400 nm
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratchresistant lens
- optional clip-in frame seal provides extra protection against particles, dirt and dust
- metal-free

2. Technical Details Body

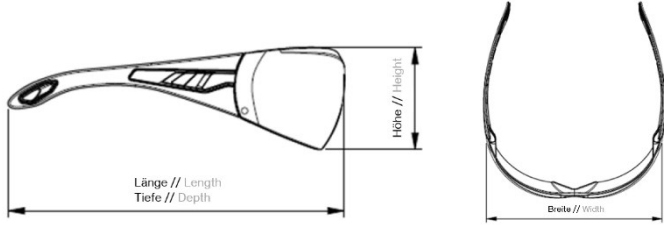
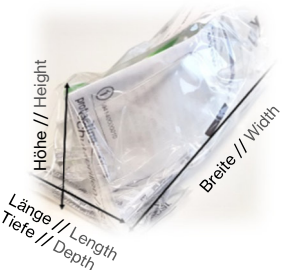
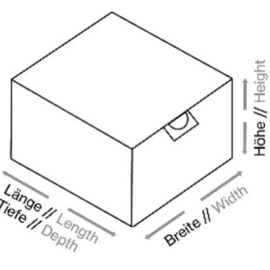
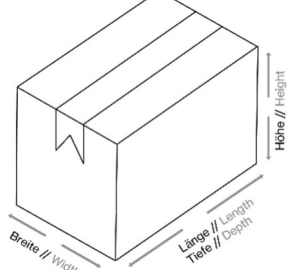
Frame	
Material	PC-PBT / TPE
Version	soft-grip temple ends, soft, flexible nose pad
Colour	anthracite, lime
Marking	
Manufacturer 's ID code	W
Applicable EN norm	166
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE

3. Technical Details Lens

Material	PC
Thickness	1.9 mm at PD
Coating	uvex supravision excellence
Colour	grey 23%
UV protection	UV400
Marking	
Filter	5-2,5 (EN 172)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

4. Logistical Information

Product

Weight	27g		
Dimensions (L x W x B) in approx. mm	 <p style="text-align: right;">picture only for reference</p>		
	158 x 150 x 50		
	Packing unit 1	Packing unit 2	Packing unit 3
EAN Code	4031101827568	4031101827568	4031101827568
Quantity in pcs.	1	10	160
Dimensions (L x W x H) in approx. mm	 <p style="text-align: center;">picture only for reference</p>		
	58 x 150 x 60	185 x 290 x 97	600 x 400 x 400
Net weight in approx. g	27	270	4,320
Gross weight in approx. g	57	680	11,670
Country of Origin	Germany		

5. Miscellaneous

Standards	EN 166 + EN 172
PPE Category	Category II