

KERN BFB 3T-3NM



Weighing bridge with screwed-on weighing plate (IP67) and XXL display device, verification optional



Pattern approval for conformity assessment	✓
Accuracy classe	III
Verification scale interval [e]	1 kg
Conformity assessment possible ex works	✓

Display

Display type	LCD
Display screen size	165×64 mm
Display backlight	✓
Display digit height	52 mm
Languages of the user interface	Symbol language

Construction

Dimension display device (W×D×H)	250×160×58 mm
Dimensions weighing platform (W×D×H)	1500×1250×85 mm
Material display housing	Plastics
Material weighing plate	steel, lacquered
Material platform	steel, powder-coated
Dimensions weighing surface (W×D)	1500×1250 mm
Cable length	5 m
Display device cable length	5 m
Allowed cable length display device [Max]	30 m
Material load cell(s)	alloyed steel
Load cells - number	4
Levelling feet adjustable	✓
Wall mount	✓
Stand inclinable	✓

Functions

Number of keys for operation	7
Auto-off interval(s) in mains power mode	selectable
Auto-off interval(s) in battery mode/rechargeable battery mode	selectable
Tare function	manual (single & multi)
Counting function	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Function for averaging under unstable weighing conditions	✓
Recipe/summing level	Sum A
Sum memory function	✓

Category

Brand	KERN
Product category	Industrial scale
Product group	Floor scale
Product family	BFB

Measuring System

Construction type of the scale	Single-range balance
Number of weighing ranges	1
Weighing system	Strain gauge
Weighing capacity [Max]	3000 kg
Readability [d]	1 kg
Resolution	3.000
Linearity	± 2 kg
Reproducibility	1 kg
Tare range	-3000 kg
Default unit	kg
Units	kg
Units (if device is conformity assessed)	kg
Minimum weight [Min]	20 kg
Adjustment options	Adjusting with external weight
Recommended adjusting weight	3000 kg (M2)
Stabilization time	2 s
Warm-up time	10 min
Eccentric loading at 1/3 [Max]	2 kg
Loadcell type	ZEMIC H8C 1.5 ton
Load cell connection	4-wire

Approval

CE mark	✓
---------	---

KERN BFB 3T-3NM



Weighing bridge with screwed-on weighing plate (IP67) and XXL display device, verification optional

Underfloor weighing	None
Interfaces	RS-232 standard
	Bluetooth BTC (v2.0) (optional, factory)
	analogue (0 - 10 V) (optional, factory)
	analogue (4 - 20 mA) (optional, factory)
IP protection - display	no IP protection
IP protection - load cell	IP67

Counting	
Reference quantity	10, 20, 50, 100, 200

Power Supply	
Input voltage power supply / power [Max]	100 V - 240 V, 50 / 60 Hz
Input voltage device / power [Max]	12 V, 500 mA
Plug-in power supply type	Power adapter
Supplied power supply	Power supply unit
Plug-in power supply / adapter for countries - included with the delivery	EURO
	UK
	US
	CH
Plug-in power supply / adapter for countries - optional	EURO
	AUS
	UK
	US
	CH

Rechargeable battery optional	Rchrg. battery optional (factory)
Rechargeable battery charging time	10 h
Rechargeable battery operating time - backlight on	8 h
Rechargeable battery operating time - backlight off	35 h
Battery	no battery
Battery / accumulator type	Pb

Environmental conditions	
Humidity of environment [Min]	0 %
Humidity of environment [Max]	80 %
Ambient temperature [Min]	-10 °C
Ambient temperature [Max]	40 °C
Storage temperature [Min]	-20 °C
Storage temperature [Max]	60 °C


Packing & Shipping	
Readability force [d] (N)	2 d

Dimensions packaging (W×D×H)	1610×1320×330 mm
Net weight	140 kg
Shipping method	Freight
Net weight approx.	140 kg
Gross weight approx.	195 kg
Shipping weight	195 kg

Services (optional)	
Article number for adjustment at the location of installation	961-252
Article number for conformity assessment	965-232
Article number for DAkkS calibration	963-132
Article number for certificate of conformity (verification)	969-517

Pictograms

STANDARD

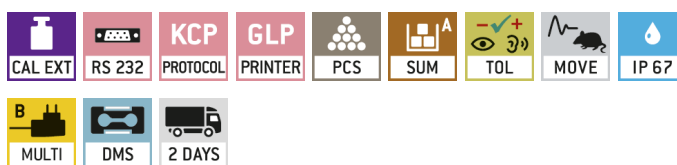

OPTION



FACTORY

