




04/2020

Oil Filter Socket, Size (waf) 74.5mm

KL-0122-57

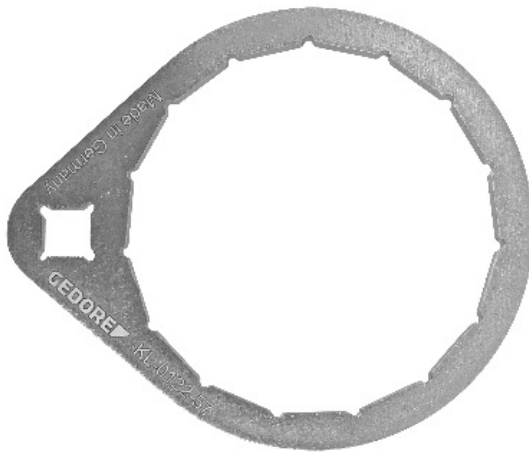

EN

www.gedore-automotive.com

GEDORE Automotive GmbH

Breslauer Straße 41
78166 Donaueschingen
Postfach 1329
DE-78166 Donaueschingen, Germany

T +49 (0) 771 / 8 32 23-0
F +49 (0) 771 / 8 32 23-90
info.gam@gedore.com
www.gedore-automotive.com

GEDORE TOOLS, INC.

Only for USA, Canada & Mexico
Sólo para EE.UU., Canadá y México
Seulement pour les USA, le Canada et le Mexique


7187 Bryhawke Circle, Suite 700
North Charleston, SC 29418, USA
Phone +1-843 / 225 50 15
Fax +1-843 / 225 50 20
info@gedoretools.com

GEDORE WELTWEIT / GEDORE WORLDWIDE

Weltweite GEDORE Servicestellen / Niederlassungen finden Sie im Internet unter: www.gedore.com
Worldwide GEDORE service centers / offices are listed on the Internet at: www.gedore.com

KL-0122-57

3/8"



Size (waf) 74.5mm
15 flats



Example of use:



Expert's Advice

How to identify the suitable oil filter socket quickly and easily:

Step 1: Check whether the oil filter has **flats or ribs**.



Step 2: Count the **number** of flats, or ribs respectively.

Step 3: Measure the **waf size**, the **Ø** respectively, of the oil filter.



Step 4: On the basis of the data thus obtained, you can then find the appropriate oil filter socket in the **GEDORE Automotive** catalogue, **chapter 6.8 - oil system**.

KL-0122-57 Oil Filter Socket, Size (waf) 74.5mm

Applicable to Ford 1.5 and 1.6 EcoBoost petrol engines.

Fitted to: Ford C-MAX II, Focus III, Galaxy III, Kuga II, Mondeo IV, Mondeo V, S-MAX II, Transit Connect II etc.

Field of Application

A special feature of this oil filter socket is its lateral drive allowing you to loosen and tighten hard-to-reach cartridge-style oil filters quickly and professionally.

Due to the limited space available in front of the cartridge oil filter, the loosening and tightening with the aid of conventional oil filter tools can be quite difficult, sometimes even impossible.

Technical Data

Size (waf): 74.5mm
 Number of flats: 15
 Drive: 3/8"

Warnings and Notes

- Before each use, visually check the tool to make sure it is not damaged.
- Always refer to the vehicle manufacturer's data and instructions as only these apply to all work that is carried out on the vehicle.