




## Solid carbide milling cutter with chip separators TPC, TiSiN, Ø e8 DC: 8mm

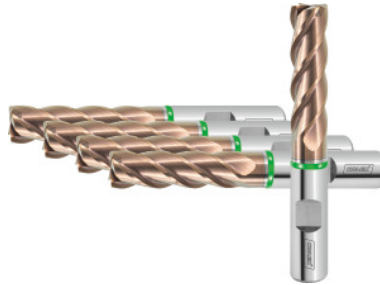

### Order data

Order number	GG3085 8
GTIN	4062406625771
Item class	GGN

### Description

#### Version:

High-performance end mill for general-purpose applications, **specially designed for TPC applications.**

**Strengthened core.**

**Optimised bending strength** due to the use of ultra-fine grain substrates.

**Chip breaker** for controlled chip breaking.

**Same as No. 203085.**

#### Note:

$h_{max}$ : The values stated in the table are maximum values.

$a_{e max} = 0.18 \times D$  for TPC machining.

### Technical description

Helix angle	40 degrees
Shank Ø $D_s$	8 mm
Recess Ø $D_1$	7.8 mm
Overhang length $L_1$ incl. recess	30 mm
Flute length $L_c$	24 mm

Corner chamfer width at 45°	0.16 mm
Average chip thickness $h_{\max}$ for TPC milling in steel < 900 N/mm <sup>2</sup>	0.062 mm
Cutting edge $\varnothing D_c$	8 mm
Tolerance nominal $\varnothing$	e8
Shank	DIN 6535 HB to h6
No. of teeth Z	4
Overall length L	68 mm
Corner chamfer angle	45 degrees
Balance quality with shank	G 2.5 with HB
Direction of infeed	horizontal and oblique
Contents	5
Coating	TiSiN
Tool material	Solid carbide
Standard	Manufacturer's standard
Type	N
Helix angle characteristic	unequal spacing
Spacing of the cutters	unequal spacing
Cutting width $a_e$ for milling operation	0.18×D
Through-coolant	no
Machining strategy	TPC
Colour ring	green
Type of product	End / face mill

## User data

	Suitability	$V_c$	ISO code
Steel < 500 N/mm <sup>2</sup>	suitable	360 m/min	P
Steel < 750 N/mm <sup>2</sup>	suitable	330 m/min	P
Steel < 900 N/mm <sup>2</sup>	suitable	290 m/min	P

Steel < 1100 N/mm <sup>2</sup>	suitable	220 m/min	P
Steel < 1400 N/mm <sup>2</sup>	suitable	140 m/min	P
INOX < 900 N/mm <sup>2</sup>	suitable	180 m/min	M
INOX > 900 N/mm <sup>2</sup>	suitable	150 m/min	M
Uni	suitable		
dry	suitable		
Air	suitable		

## Accessories

Solid carbide milling cutter with chip separators TPC Ø e8  
DC 8 mm

203085 8