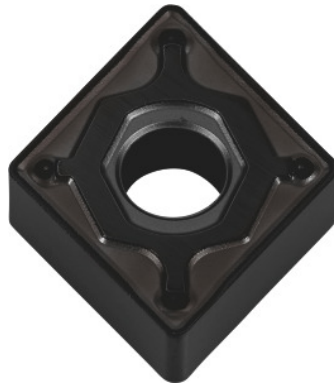


**Garant****CNMG 120416, Grade: HB7130-2**

## Order data

Order number	250162 HB7130-2
GTIN	4067263121381
Item class	21G

## Description

CNMG 120416 HB7130-2 Grade: HB7130-2  
Chip breaker: VM  
Tolerance: M  
Cutting depth  $a_p$ : 0.5 - 4 mm  
Feed  $f$ : 0.1 - 0.4 mm/rev.  
Cutting speed  $v_c$  main application: 70 - 240 m/min

## Technical description

Corner radius	1.6 mm
Chip breaker	VM
ISO code indexable insert	CNMG 120416
Tool material	Carbide
Number of changes/inserts	4
Cutting speed $v_c$ main application	70 - 240 m/min

Feed f	0.1 - 0.4 mm/rev.
Cutting conditions	slightly interrupted
Cutting depth $a_p$	0.5 - 4 mm
Grade	HB7130-2
Main application	M
Coating	coated
Finishing/roughing assignment	Finishing
Tolerance	M
Type of product	Indexable insert for turning