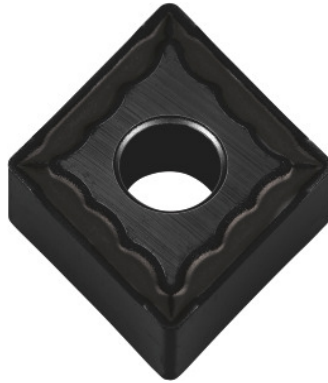


Garant
CNMG 120416, Grade: HB7130-2


Order data

Order number	250328 HB7130-2
GTIN	4067263290612
Item class	21G

Description

CNMG 120416 HB7130-2 Grade: HB7130-2
 Chip breaker: VG
 Cutting depth a_p : 1.5 - 6 mm
 Feed f : 0.25 - 0.6 mm/rev.
 Cutting speed v_c main application: 60 - 220 m/min

Technical description

Cutting conditions	slightly interrupted
Number of changes/inserts	4
Tool material	Carbide
Grade	HB7130-2
Finishing/roughing assignment	Roughing
Chip breaker	VG
Feed f	0.25 - 0.6 mm/rev.

Cutting depth a_p	1.5 - 6 mm
ISO code indexable insert	CNMG 120416
Corner radius	1.6 mm
Main application	M
Coating	coated
Cutting speed v_c main application	60 - 220 m/min
Type of product	Indexable insert for turning