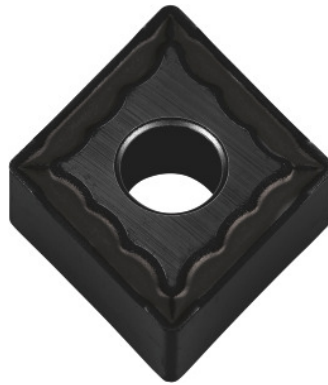


Garant**CNMG 160616, Grade: HB7130-2**

Order data

Order number	250338 HB7130-2
GTIN	4067263290643
Item class	21G

Description

CNMG 160616 HB7130-2 Grade: HB7130-2
Chip breaker: VG
Cutting depth a_p : 1.5 - 6 mm
Feed f : 0.25 - 0.6 mm/rev.
Cutting speed v_c main application: 60 - 220 m/min

Technical description

Finishing/roughing assignment	Roughing
Number of changes/inserts	4
Corner radius	1.6 mm
Main application	M
Tool material	Carbide
Feed f	0.25 - 0.6 mm/rev.
Cutting depth a_p	1.5 - 6 mm

ISO code indexable insert	CNMG 160616
Cutting speed v_c main application	60 - 220 m/min
Grade	HB7130-2
Chip breaker	VG
Coating	coated
Cutting conditions	slightly interrupted
Type of product	Indexable insert for turning