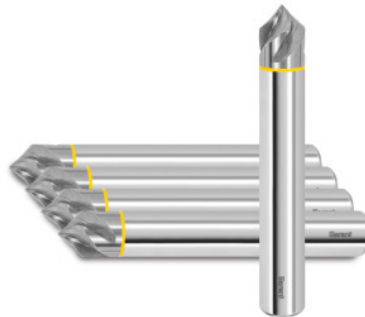


**Garant****Solid carbide deburrer, spiral flutes 90°, uncoated, Ø h6 DC: 10mm****Order data**

Order number	GG8154 10
GTIN	4067263090977
Item class	GGN

**Description****Version:****Same as No. 208154.**Deburrer with **polished flutes** and **sharp cutting edges** especially for machining aluminium and plastic.Tolerance: **Dimension S = +/- 0.2 mm.****Point angle = +/- 5 arc minutes.****Outstanding surface qualities** thanks to the 35° **helix angle**.**Application:**Perfectly suitable for **chamfering** and **deburring** component edges and for **contouring applications**.**Technical description**

Dimension S	7 mm
No. of teeth Z	4
Feed $f_z$ in PMMA acrylic	0.07 mm
Chamfer mill	45 degrees
Shank	DIN 6535 HA to h6

Contents	5
Cutting edge $\varnothing D_c$	10 mm
Feed $f_z$ in short-chipping aluminium	0.07 mm
Overall length L	72 mm
Shank $\varnothing D_s$	10 mm
Coating	uncoated
Tool material	Solid carbide
Standard	Works standard
Type	N
Tolerance nominal $\varnothing$	h6
Helix angle	35 degrees
Direction of infeed	horizontal, oblique and vertical
Countersink tip angle	90 degrees
Through-coolant	no
Shank tolerance	h6
Colour ring	red
Type of product	Deburrers

## User data

	Suitability	$V_c$	ISO code
Alu plastics	suitable	480 m/min	N
Aluminium (short chipping)	suitable	440 m/min	N
Alu > 10% Si	suitable	400 m/min	N
PMMA acrylic	suitable	210 m/min	N
PEEK	suitable	150 m/min	N
PVDF GF20	suitable	150 m/min	N
POM GF25	suitable	150 m/min	N
PA 66 GF30	suitable	150 m/min	N

PEEK GF30	suitable	130 m/min	N
PTFE CF25	suitable	160 m/min	N
Honeycomb sandwich	suitable	300 m/min	N
Cu	suitable	160 m/min	N
CuZn	suitable	200 m/min	N
wet maximum	suitable		

## Accessories

Solid carbide deburrer, spiral flutes 90° Ø h6 DC 10 mm

208154 10