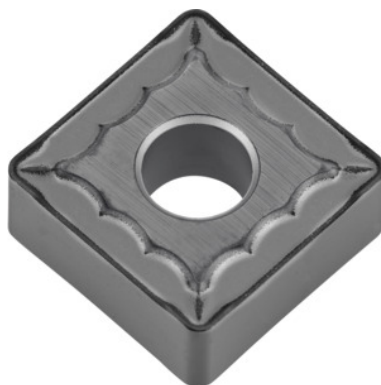


Garant**Indexable insert for turning SNMG 150616, for roughing machining****Order data**

Order number	251332 HB7130-2
GTIN	4069515023061
Item class	21G

Technical description

Cutting conditions	slightly interrupted
Chip breaker	VG
Type	HB7130-2
Cutting depth a_p	1.5 - 7 mm
Tool material	Carbide
Feed f	0.2 - 0.55 mm/rev.
Corner radius	1.6 mm
Number of changes/inserts	8
Cutting speed v_c main application	60 - 220 m/min
Finishing/roughing assignment	Roughing
ISO code indexable insert	SNMG 150616

Data sheet

Main application	M
Type of product	Indexable insert for turning