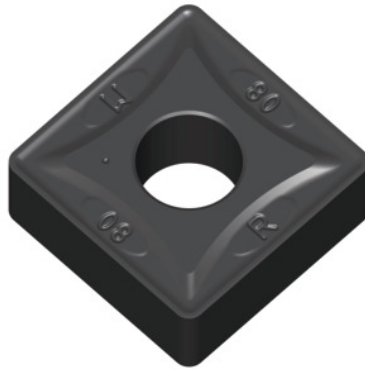


Garant**SNMG 120412, Grade: HB7210-1**

Order data

Order number	251326 HB7210-1
GTIN	4062406059088
Item class	21G

Technical description

Corner radius	1.2 mm
Grade	HB7210-1
Main application	K
Cutting conditions	slightly interrupted
Tool material	Carbide
Finishing/roughing assignment	Roughing
Cutting depth a_p	0.4 - 6.5 mm
Feed f	0.32 - 0.8 mm/rev.
Chip breaker	GG
Cutting speed v_c main application	100 - 450 m/min
Coating	TiCN

ISO code indexable insert	SNMG 120412
Number of changes/inserts	8
Type of product	Indexable insert for turning