


# TECHNICAL DATA SHEET

**LASLO ESD S1P No. 716271**

**Sz. 38 - 50**

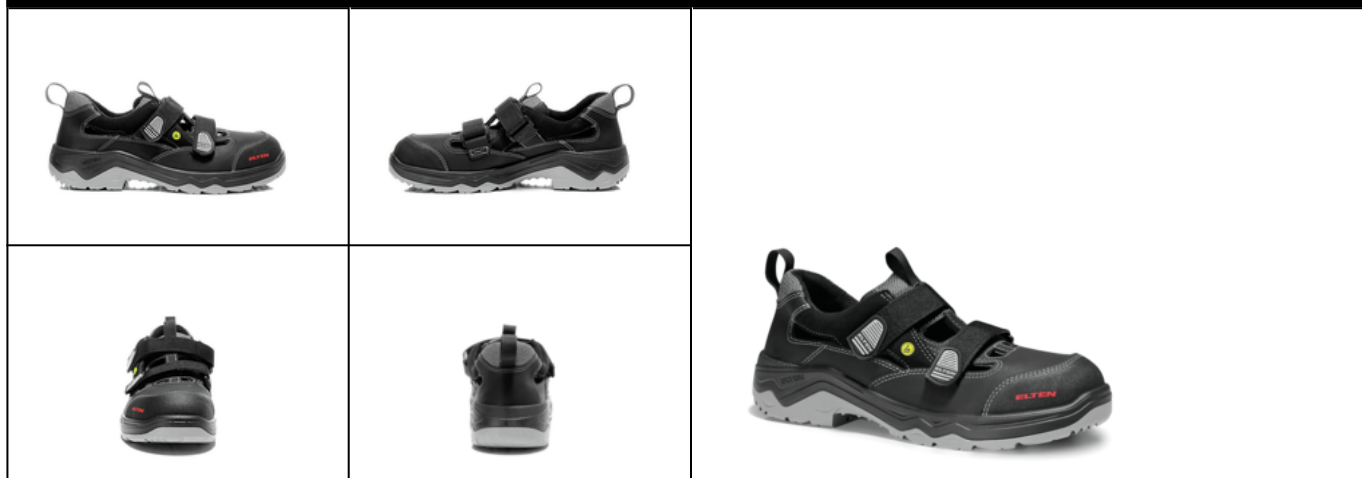

## LABELLING ACCORDING TO STANDARD FORM

Safety sandal



Form A - in size 42, the upper height must not exceed 11.2 cm.

## AREAS OF APPLICATION

Areas of application

Dry work areas  
Industry, storage, transport, assembly etc.  
Areas where there is a risk of penetration from pointed and sharp objects (S1P/S1PL/S1PS)  
Areas where there is a risk of electrostatic discharge (ESDS/ESD)

## FEATURES

ESD equipment

Thanks to its excellent discharge capability, the shoe is suitable for work in ESD sensitive or electrostatically protected areas (EPA). The shoes comply to the standard 61340-5-1.



Sizes (unisex model)

- Expanded size range: available in sizes 38 - 50

Certification in accordance with DGUV rule 112-191

- Certified for orthopaedic inserts



Padded upper edge


- Excellent wearing comfort: the padded upper edge protects the Achilles tendon.

Padded tongue

- Excellent wearing comfort: The tongue prevents pressure marks.


Hook-and-pile fastener

- Can be opened and closed easily and quickly
- Individually adjustable for optimal adaptation to the foot
- Improves the comfort and fit

FEATURES	
Heel loop	<ul style="list-style-type: none"> <li>• Quicker into the shoe: The heel loop makes it easier to get inside the shoe</li> </ul>
UPPER MATERIAL	
Cowhide leather	<ul style="list-style-type: none"> <li>• Areas of application S1/S2/S3</li> <li>• Natural material</li> <li>• Wear-resistant</li> <li>• Breathable</li> <li>• Water penetration/absorption in accordance with EN ISO 20345 S2</li> </ul>
Textile material	<ul style="list-style-type: none"> <li>• Areas of application S1</li> <li>• Synthetic material</li> <li>• Retains its shape</li> <li>• Tear-resistant</li> <li>• Quick drying</li> <li>• Abrasion resistant and light</li> </ul>
Microfibre	<ul style="list-style-type: none"> <li>• Synthetic material</li> <li>• Particularly soft</li> <li>• Retains its shape</li> <li>• Tear-resistant</li> <li>• Quick drying</li> <li>• Abrasion-resistant and light</li> </ul>
LINING	
Breathable fabric lining	<ul style="list-style-type: none"> <li>• Climate-regulating</li> <li>• Good ventilation</li> <li>• Skin-friendly</li> <li>• High absorption and emission of moisture</li> </ul>
Heel pocket lining	<ul style="list-style-type: none"> <li>• The abrasion-resistant microfibre material is particularly sturdy and provides for a pleasant wearing comfort.</li> </ul>
TOE PROTECTION CAP	
Steel toe cap 	<ul style="list-style-type: none"> <li>• Protection against impacts of min. 200 joules and pressure loading of min. 15 kN</li> <li>• Permanent edge coverage for cushioning</li> <li>• Ergonomically shaped</li> <li>• Comfortable toe room</li> <li>• Good coverage of the little toe area</li> </ul>

## INLAY SOLE

Full-length inlay sole  
ESD PRO (rec)



- ESD EQUIPMENT: Protection against electrostatic discharge (ESD). The full-length, exchangeable inlay sole is conductive and designed for the use in ESD safety footwear according to the standards DIN EN ISO 20345 and DIN EN 61340-5-1.
- Inlay sole with recycled material content
- The full-length, exchangeable inlay sole provides the highest possible comfort in safety shoes.
- The inlay sole is functionally absorbing and releasing moisture and thus provides for a pleasant foot climate.
- The extreme softness of the PU foam absorbs shocks on impact and increases walking comfort.
- Improvement of the shoe climate thanks to the PU foam's open cell structure. So the foot is always kept comfortably dry.

## INSOLE

ESD soft-fleece insole

ESD equipment: Protection against electrostatic discharge (ESD), and without using additional means fulfilling a bridge function to the outsole.

- Approximately 50 % lighter than comparable soles made of natural materials
- Flexible and shape-retaining
- Good air permeability
- Excellent wear resistance
- High moisture absorption
- Quick drying (virtually overnight)

## PENETRATION RESISTANCE

Steel midsole

Best possible protection from below: The corrosion-resistant midsole made of stainless steel complies with the penetration safety standard EN 12568 and furthermore fulfils the additional requirements for penetration protection in accordance with EN ISO 20344 / 20345. Particularly recommendable when working in areas where there is an increased risk of injuries due to pointed or sharp objects, such as in the construction industry.

## OUTSOLE

NEW CLASSICS double-density sole with profile



- Excellent slip resistance
- Antistatic

Outsole: PU (polyurethane)

- Colour: lightgrey
- Profile depth: 4.0 mm
- Abrasion-resistant
- Heat-resistant to approx. 130°C
- Flexible at cold temperatures to approx. -20°C
- Oil and fuel resistant

Midsole: PU (polyurethane)

- The soft PU core provides a good impact absorption and high wearing comfort